


Q2330E Duplexer, Q-Circuit, Res-Lok, 6 cavity, rack mount, 138-174 MHz

- Six-cavity provides 85 dB isolation
- Res-Lok design reduces inter-cavity cabling and losses
- Provides up to 85 dB isolation at frequency separation of 500 KHz

Sinclair developed the Q2330E design coupled with our Res-Lok™ modular construction resulting in an extremely versatile duplexers offering exceptional performance. The Q2330E design provides a quasi-bandpass response, resulting in suppression of spurious and sideband transmitter noise between and adjacent to the duplex frequencies. Coupled with carefully temperature compensated components this series of duplexers ensures performance stability at very low frequency separations and insertion loss values.

Application Notes

- Res-Lok™ modular construction offers a variety of mounting options. The multi position brackets supplied with each duplexer allow easy rack, wall or floor mounting to suit system and equipment room limitations. A variety of system-specific configurations is available in the 138-174 MHz frequency range.

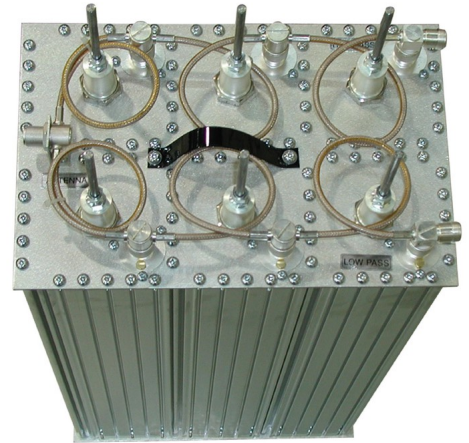

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		Q2330E	Issue: 96	Dated: 08-10-13

Electrical Specifications


Frequency Range	MHz	138 to 174
Number of cavities Tx Side		3
Number of Cavities Rx Side		3
Insertion Loss Low Pass to Ant (max)	dB	1.5
Insertion Loss High Pass to Ant (max)	dB	1.5
Input VSWR (max)		1.5:1
Impedance	Ω	50
Isolation Rx carrier suppression at Tx (min)	dB	85
Isolation Tx noise suppression at Rx (min)	dB	85
Average Power Input (max)	W	350
Connectors		N-Female
Frequency separation (min)	MHz	0.5
Insertion loss Rx to antenna (typ)	dB	1.4
Insertion loss Tx to antenna (typ)	dB	1.4

Mechanical Specifications

Depth	in (mm)	30.3 (770)
Length/ Height	in (mm)	8.37 (213)
Width	in (mm)	19 (483)
Weight	lbs (kg)	45 (20.43)
Finish		chromate conversion
Actual Shipping weight	lbs (kg)	50 (22.7)
Shipping dimensions	in (mm)	12x16x37 (305x406x940)
Mounting configurations		19 inch rack

Environmental Specifications

Temperature range	°F (°C)	-40 to +140 (-40 to +60)
-------------------	---------	--------------------------

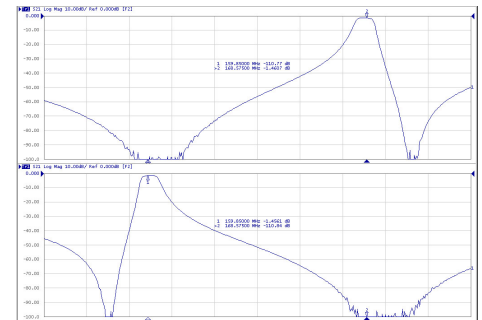

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		Q2330E	Issue: 96	Dated: 08-10-13